
# WIRING DIAGRAM: SMALL EQUIPMENT ENCLOSURE2(SECONDARY/REMOTE)

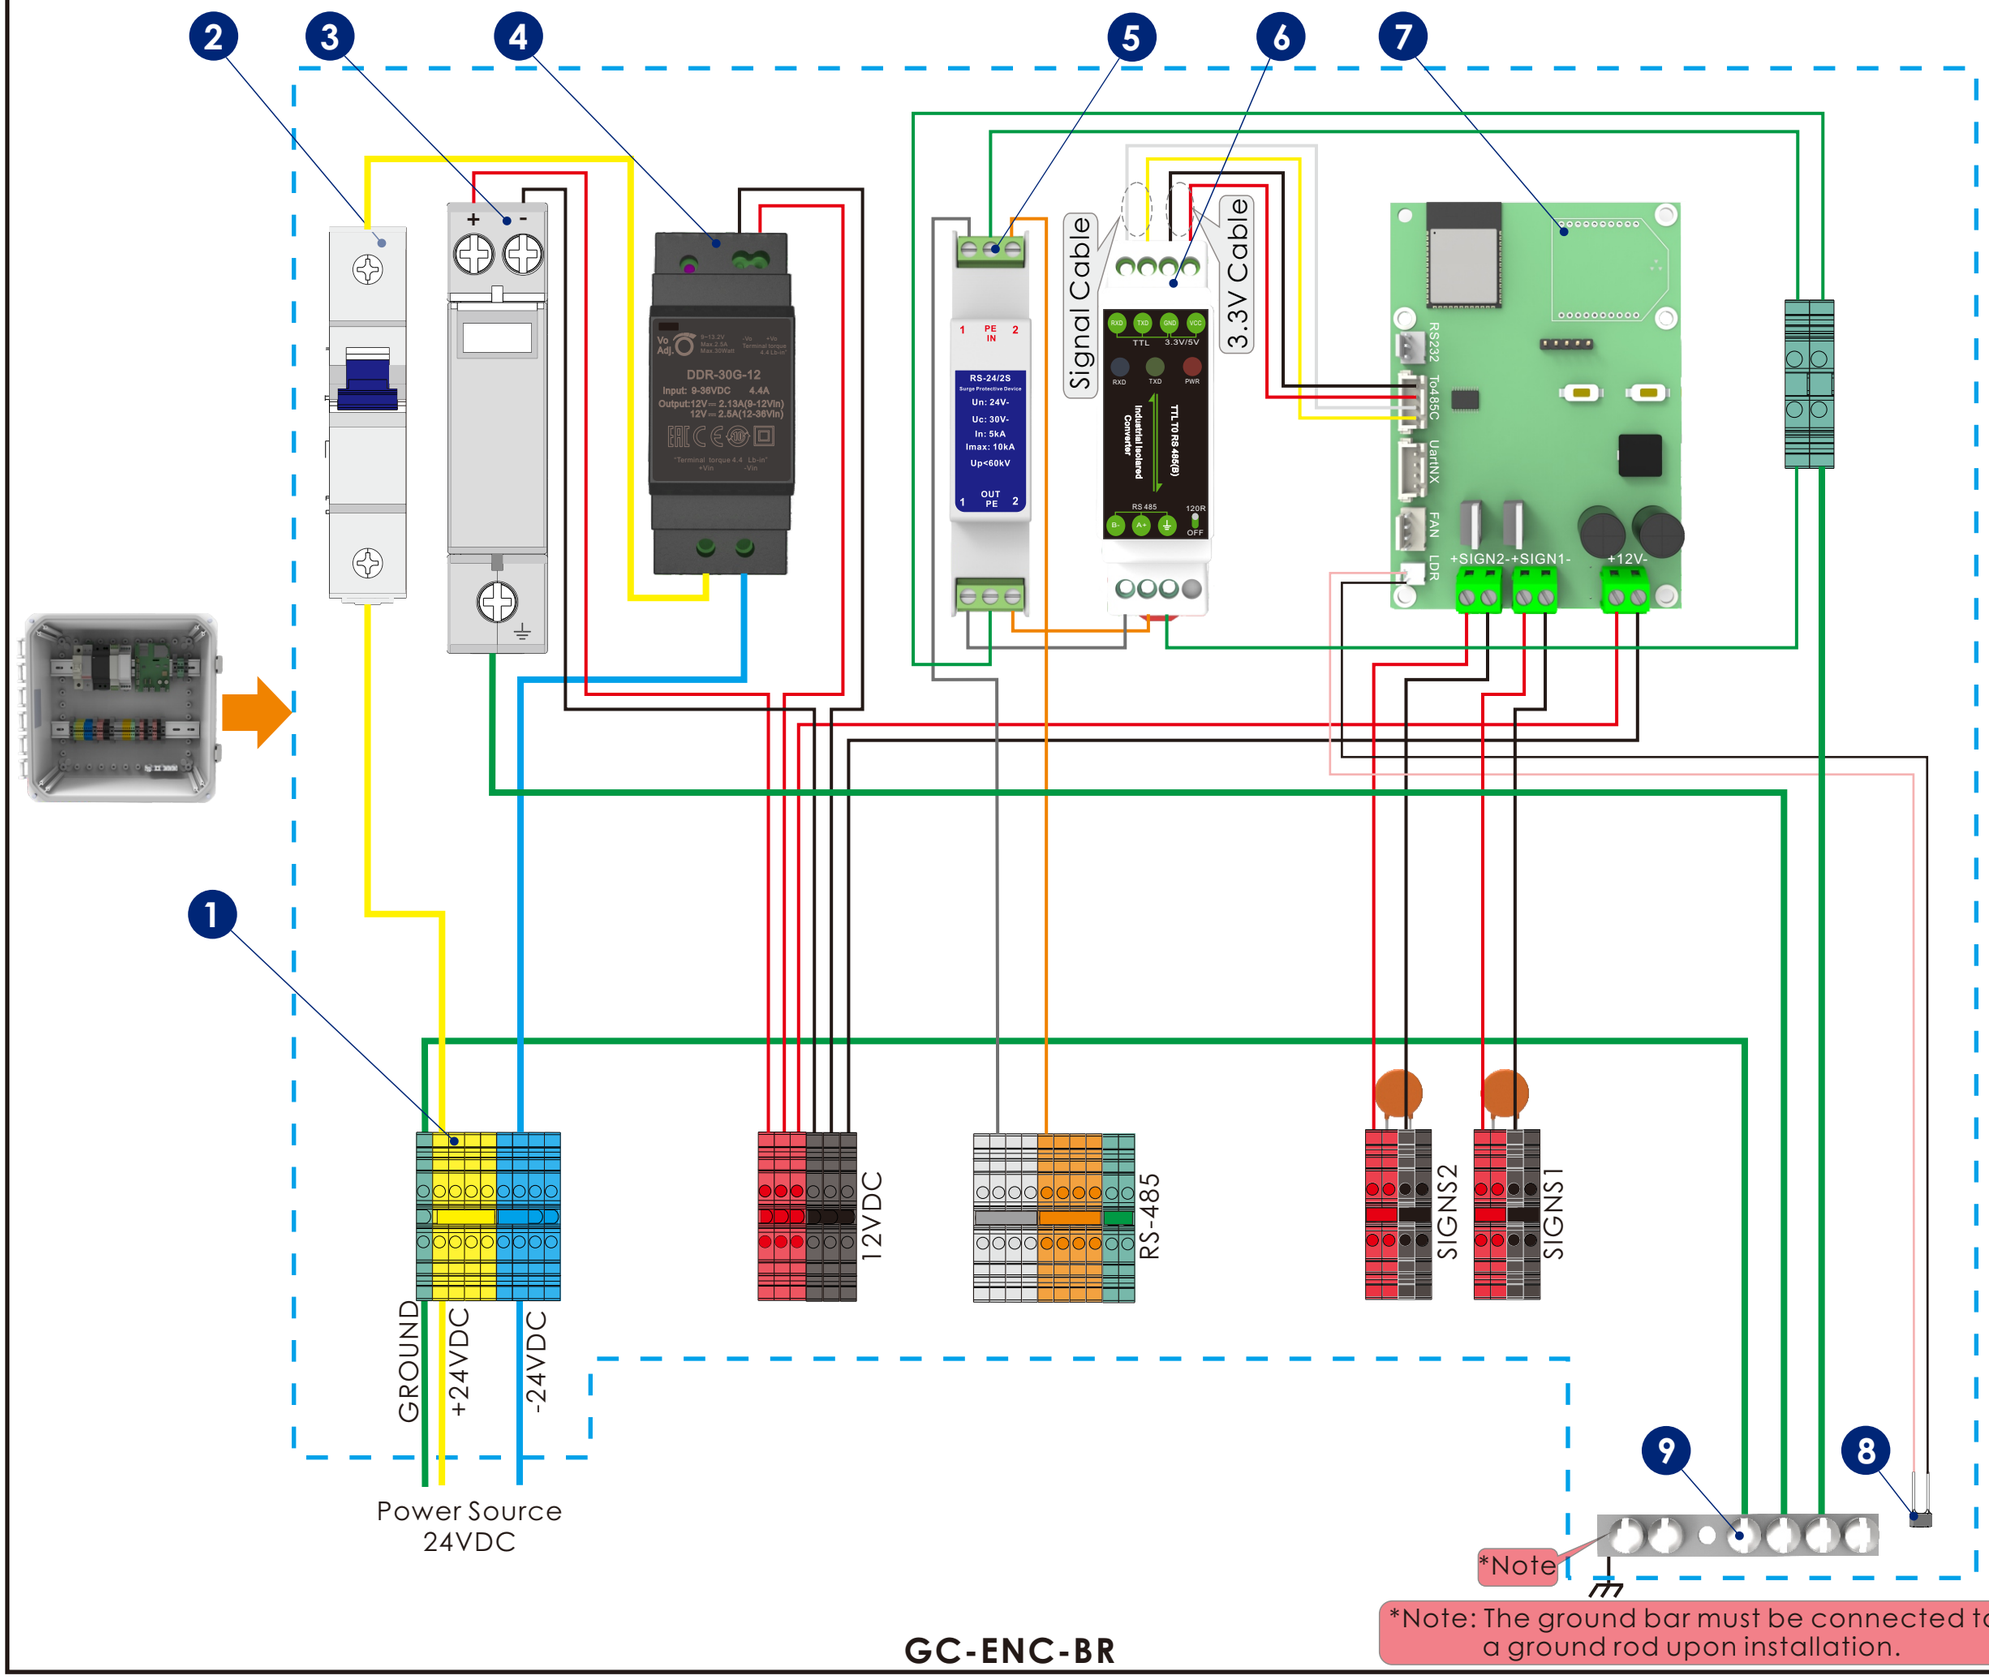


GC-ENC-BR

## CABLE INFORMATION

| | |
|---|---|
| +24VDC | |
| −24VDC | |
| GROUND | |
| +12VDC | |
| −12VDC | |
| +RS-485 | |
| −RS-485 | |
| +PHOTO CELL | |
| −PHOTO CELL | |

| No. | NAME |
|---|---|
| 1 | TERMINAL BLOCKS |
| 2 | BREAKER |
| 3 | SPD |
| 4 | 24VDC TO 12VDC CONVERTER |
| 5 | RS-485 SPD |
| 6 | RS-485 CONVERTER |
| 7 | CONTROLLER |
| 8 | PHOTO CELL |
| 9 | GROUND BAR |

**GC-HS-SECONDARY/REMOTE**
Wiring Diagram for Secondary/Remote Highlighted Sign Enclosures for DC

TYPICAL EQUIPMENT CONFIGURATION
FOR AN AC POWERED
WRONG-WAY VEHICLE DETECTION SYSTEM

govcomm

WIRING DIAGRAM: SMALL EQUIPMENT ENCLOSURE2